



PLAN

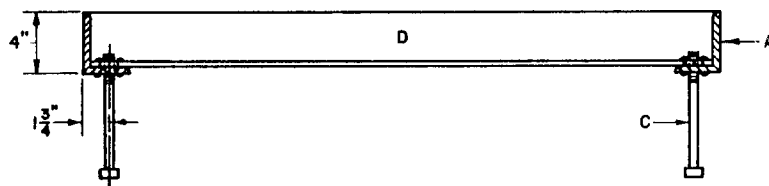

SECTION A-A

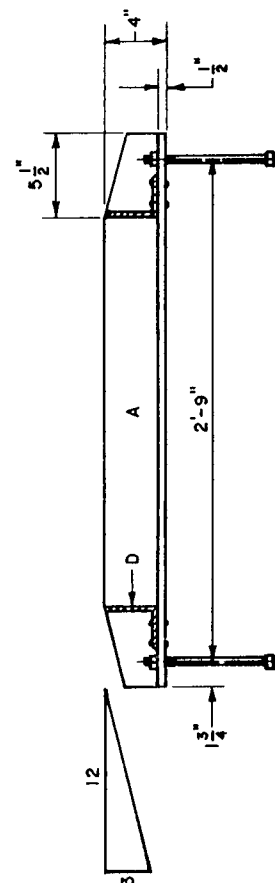

SECTION B-B

## GENERAL NOTES:

1. ALL EXPOSED METAL PARTS SHALL BE PAINTED PRIOR TO ASSEMBLY. WELDING, MACHINING AND DRILLING SHALL BE DONE PRIOR TO PAINTING. ALL DIMENSIONS ARE FINISH DIMENSIONS.
2. ALL PARTS SHALL BE OF STRUCTURAL STEEL, GRADE 36.
3. FOR CLEANING AND PAINTING OF FRAME SEE DWG. 2215, GENERAL NOTE NO. 4.
4. FRAME MAY BE WELDED OR RIVETED.

## CONSTRUCTION NOTES:

- A. 4" x 3" x 1/2" x 3'-1/2"  $\angle$ .
- B. 2-3/8" RIVETS AT EACH CORNER, SEE GENERAL NOTE NO. 5.
- C. 4'-1/2" x 8" BOLTS WITH SQUARE HEAD & NUT AT EACH CORNER. FOR ANCHORING FRAME INTO CONCRETE WALL.
- D. 3'-1/2" x 3" x 3/8" x 3'-4-3/8"  $\angle$ .

REVISIONS	CITY OF ALBUQUERQUE	
	DRAINAGE	
	STORM INLET FRAME	
	DWG. 2216	
	AUG. 1986	